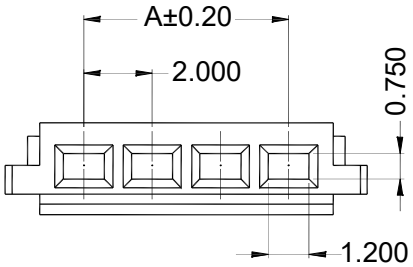

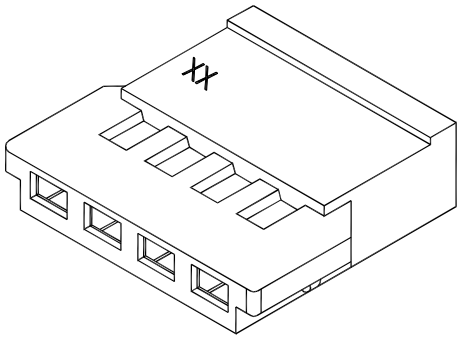

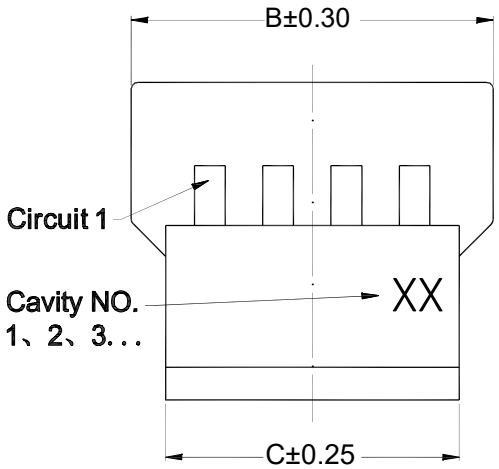

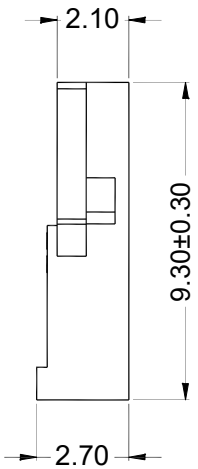

Circuits	Dimensions (mm)		
	A	B	C
2	2.00	6.60	4.60
3	4.00	8.60	6.60
4	6.00	10.60	8.60
5	8.00	12.60	10.60
6	10.00	14.60	12.60
7	12.00	16.60	14.60
8	14.00	18.60	16.60
9	16.00	20.60	18.60
10	18.00	22.60	20.60
11	20.00	24.60	22.60
12	22.00	26.60	24.60

Specifications:

Current Rating: 2.0A AC/DC
Voltage rating: 125V AC/DC
Temperature range: -25°C to +85°C
Contact resistance: 20mΩ max.
Insulation resistance: 1000MΩ min.
Withstand voltage: 500V AC/minute

Material:

Housing: PBT, UL94V-0, white

Mates with:

2013WM (housing, male)

Used with:

2013TF-PT (female terminal)

Part Number Information:

2013 WF - XX 05 WH

- Series Number
- WF: wire connector, female
- No. of circuits, 02 to 12
- Material: 05-- PBT, UL94V-0
- Color: WH -- white

							General Tolerance	Zeakka Electronics				Document No.: ZK-2013WF		
							.X ±0.3					Title: HOUSING, FEMALE, CRIMP TYPE, SINGLE ROW, 2.0MM PITCH		
							.XX ±0.2							
							.XXX ±0.1	APPR	CH'K	DRWN	Date	Dimensions	Scale	Version
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION				2020.8.7	mm	1:1	A

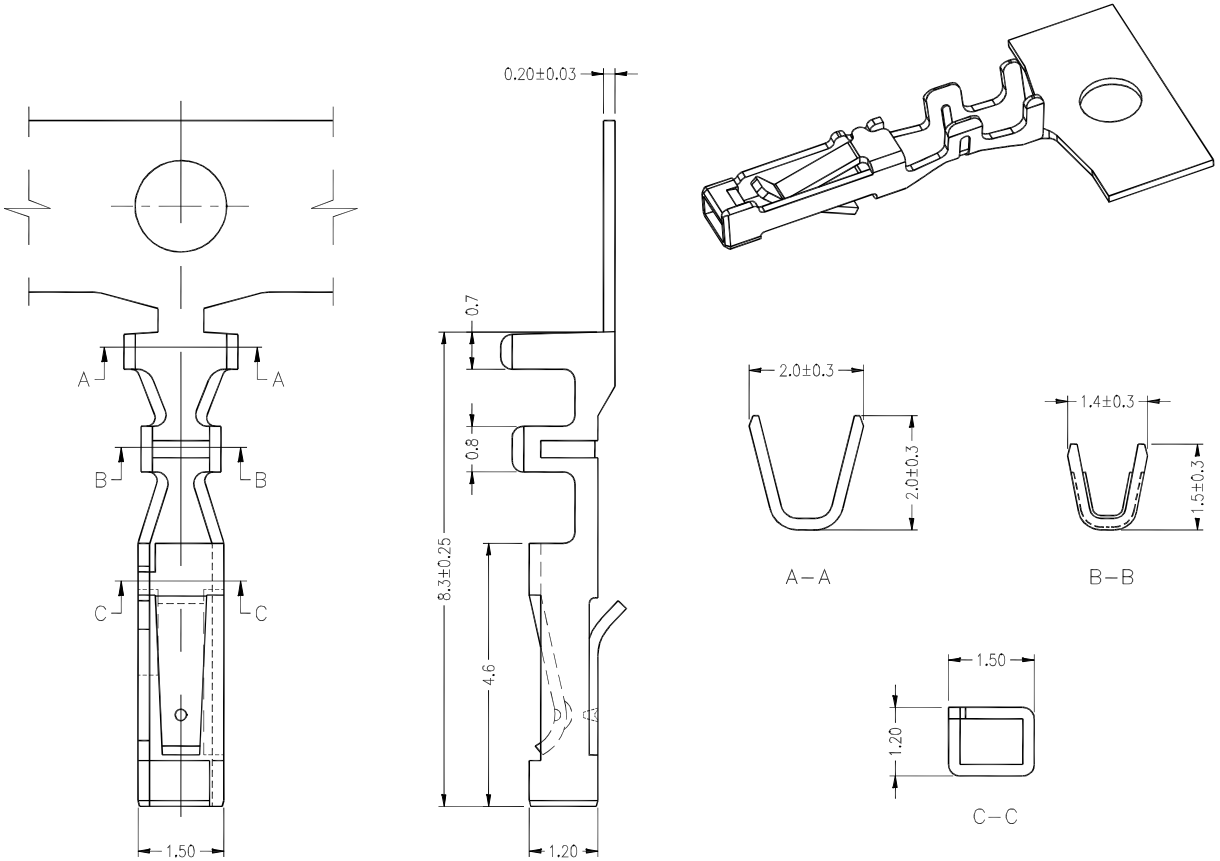

Specifications:

Current Rating: 2.0A AC/DC
Voltage rating: 125V AC/DC
Temperature range: -25°C to +85°C
Contact resistance: 20mΩ max.
Insulation resistance: 1000MΩ min.
Withstand voltage: 500V AC/minute
Applicable wire: AWG28 - AWG22
Insulation OD: max 1.40mm
Package: 10000pcs / reel

Material:

Phosphor bronze

Used with: 2013WF (female housing)

Part Number Information:

2013 TF - P T

Series Number
TF: terminal, female
Material: P -- phosphor brozne
Plating: T -- tin plating

							General Tolerance	Zeakka Electronics				Document No.: ZK-2013TF		
							.X ±0.3					Title: TERMINAL, FEMALE, CRIMP TYPE, PHOSPHOR BRONZE, TIN, REEL		
							.XX ±0.2							
							.XXX ±0.1	APPR	CH'K	DRWN	Date	Dimensions	Scale	Version
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION				2020.8.7	mm	1:1	A

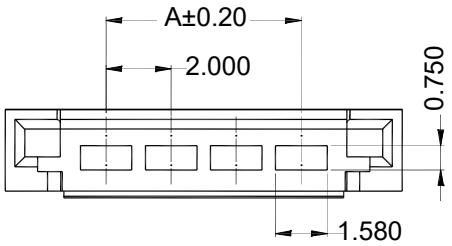

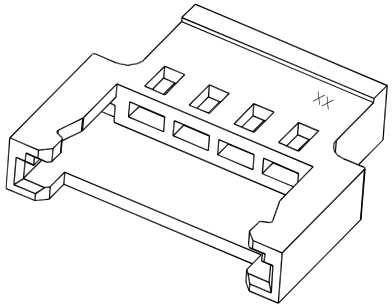

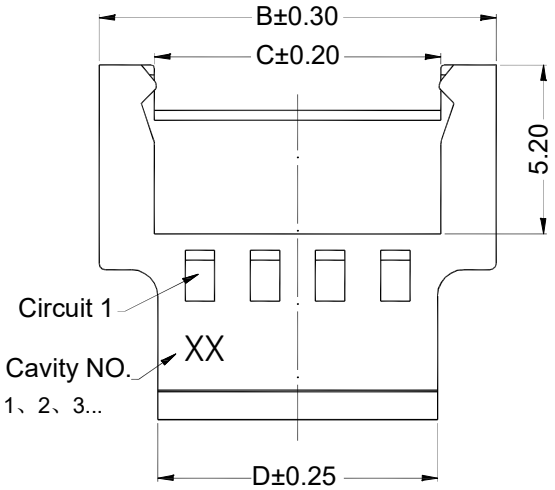

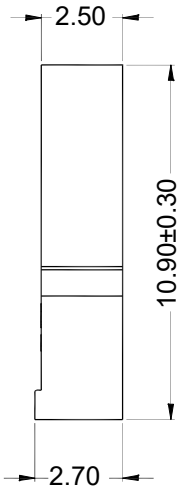

Circuits	Dimensions (mm)			
	A	B	C	D
2	2.00	8.20	4.80	4.60
3	4.00	10.20	6.80	6.60
4	6.00	12.20	8.80	8.60
5	8.00	14.20	10.80	10.60
6	10.00	16.20	12.80	12.60
7	12.00	18.20	14.80	14.60
8	14.00	20.20	16.80	16.60
9	16.00	22.20	18.80	18.60
10	18.00	24.20	20.80	20.60
11	20.00	26.20	22.80	22.60
12	22.00	28.20	24.80	24.60

Specifications:

Current Rating: 2.0A AC/DC
Voltage rating: 125V AC/DC
Temperature range: -25°C to +85°C
Contact resistance: 20mΩ max.
Insulation resistance: 1000MΩ min.
Withstand voltage: 500V AC/minute

Material:

Housing: PBT, UL94V-0, white

Mates with:

2013WF (housing, female)

Used with:

2013TM-PT (male terminal)

Part Number Information:

2013 WM - XX 05 WH

- Series Number
- WM: wire connector, male
- No. of circuits, 02 to 12
- Material: 05-- PBT, UL94V-0
- Color: WH -- white

							General Tolerance	Zeakka Electronics				Document No.: ZK-2013WM		
							.X ±0.3					Title: HOUSING, MALE, CRIMP TYPE, SINGLE ROW, 2.0MM PITCH		
							.XX ±0.2							
							.XXX ±0.1	APPR	CH'K	DRWN	Date	Dimensions	Scale	Version
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION				2020.8.7	mm	1:1	A

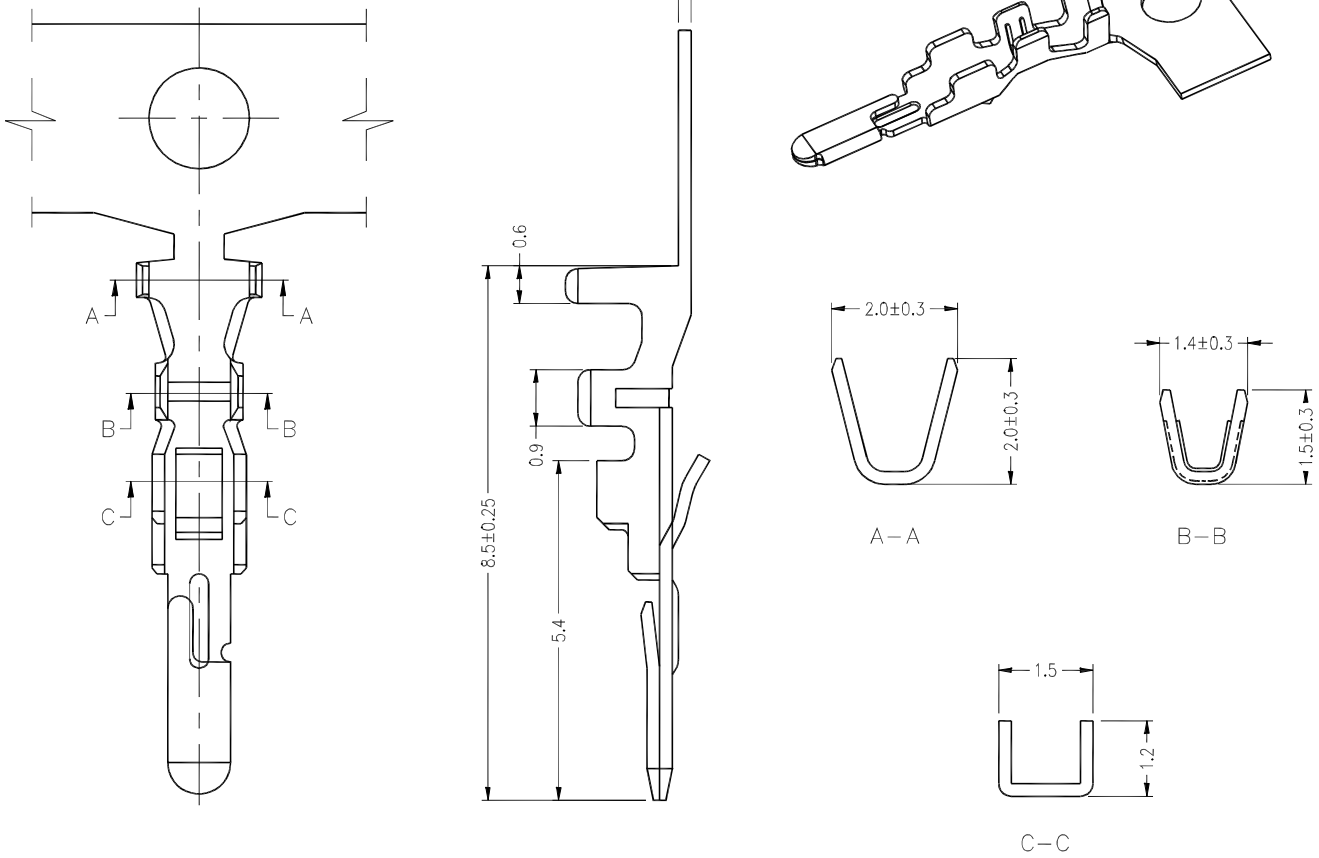

Specifications:

Current Rating: 2.0A AC/DC
Voltage rating: 125V AC/DC
Temperature range: -25°C to +85°C
Contact resistance: 20mΩ max.
Insulation resistance: 1000MΩ min.
Withstand voltage: 1000V AC/minute
Applicable wire: AWG28 - AWG22
Insulation OD: max 1.40mm
Package: 10000pcs / reel

Material:

Phosphor bronze

Used with: 2013WM (male housing)

Part Number Information:

2013 TM - P T

Series Number
TM: terminal, male
Material: P -- phosphor brozne
Plating: T -- tin plating

							General Tolerance	Zeakka Electronics				Document No.: ZK-2013TM		
							.X ±0.3					Title: TERMINAL, MALE, CRIMP TYPE, PHOSPHOR BRONZE, TIN, REEL		
							.XX ±0.2							
							.XXX ±0.1	APPR	CH'K	DRWN	Date	Dimensions	Scale	Version
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION				2020.8.7	mm	1:1	A