Specifications:

Current Rating: 10.0A AC/DC
Voltage rating: 300V AC/DC
Temperature range: -25°C to +85°C
Contact resistance: 15mΩ max.
Insulation resistance: 1000MΩ min.
Withstand voltage: 1500V AC/minute

Material:

Housing: nylon 66, UL94V-0, white

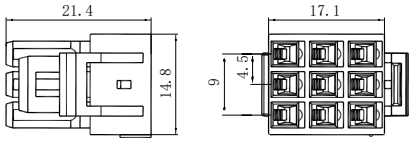

Part Number: 4502WF-T0900WH

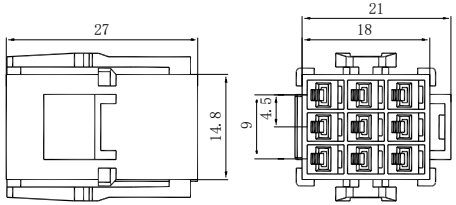

Part Number: 4502WM-T0900WH

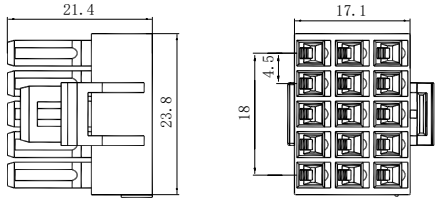

Part Number: 4502WF-T1500WH

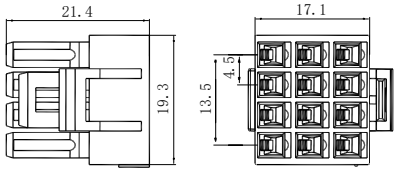

Part Number: 4502WF-T1200WH

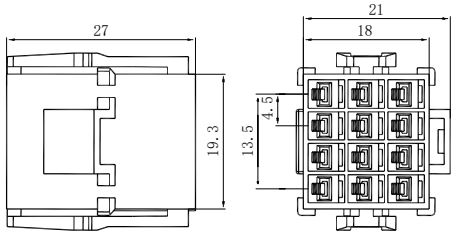

Part Number: 4502WM-T1200WH

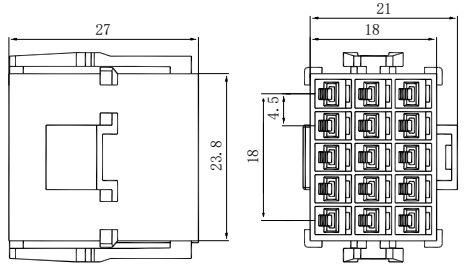

Part Number: 4502WM-T1500WH

							General Tolerance	Zeakka Electronics				Document No.: ZK-4502W-T		
							.X ±0.3					Title: HOUSING, CRIMP TYPE, TRIPLE ROW, 4.5MM PITCH		
							.XX ±0.2							
							.XXX ±0.1	APPR	CH'K	DRWN	Date	Dimensions	Scale	Version
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION				2020.8.8	mm	1:1	A



Part Number: 4502WF-D0400WH

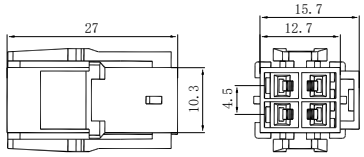

Part Number: 4502WM-D0400WH

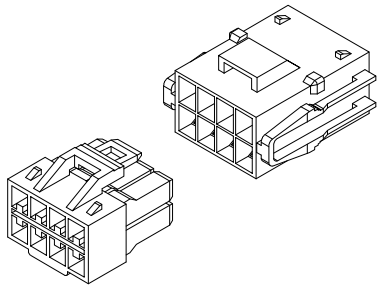

Specifications:

Current Rating: 10.0A AC/DC
Voltage rating: 300V AC/DC
Temperature range: -25°C to +85°C
Contact resistance: 15mΩ max.
Insulation resistance: 1000MΩ min.
Withstand voltage: 1500V AC/minute

Material:

Housing: nylon 66, UL94V-0, white



Part Number: 4502WF-D0600WH

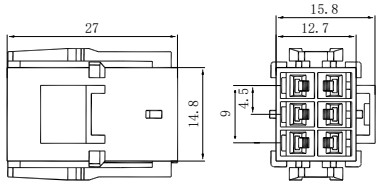

Part Number: 4502WM-D0600WH

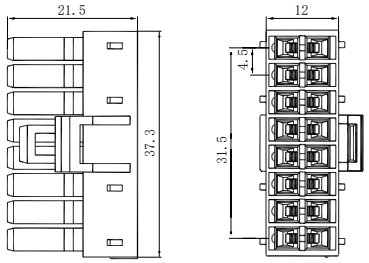

Part Number: 4502WF-D1600WH

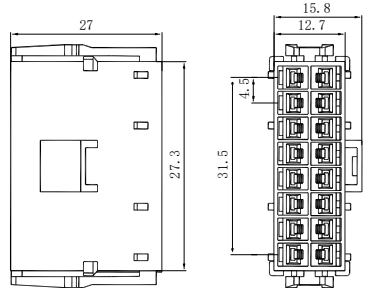

Part Number: 4502WM-D1600WH



Part Number: 4502WF-D0800WH

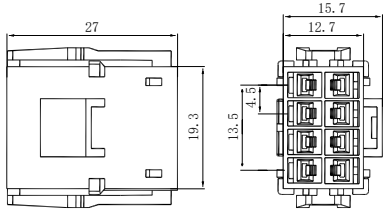

Part Number: 4502WM-D0800WH



Part Number: 4502WF-D1200WH

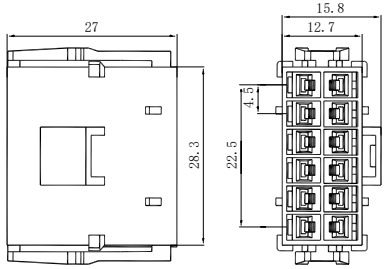

Part Number: 4502WM-D1200WH

							General Tolerance	Zeakka Electronics				Document No.: ZK-4502W-D		
							.X ±0.3					Title: HOUSING, CRIMP TYPE, DUAL ROW, 4.5MM PITCH		
							.XX ±0.2							
							.XXX ±0.1	APPR	CH'K	DRWN	Date	Dimensions	Scale	Version
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION				2020.8.8	mm	1:1	A

Specifications:

Current Rating: 10.0A AC/DC
Voltage rating: 300V AC/DC
Temperature range: -25°C to +85°C
Contact resistance: 15mΩ max.
Insulation resistance: 1000MΩ min.
Withstand voltage: 1500V AC/minute

Material:

Housing: nylon 66, UL94V-0, white



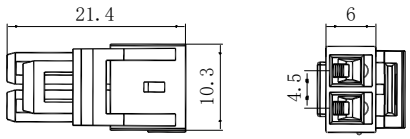

Part Number: 4502WF-S0200WH

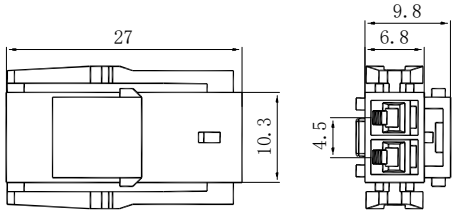

Part Number: 4502WM-S0200WH

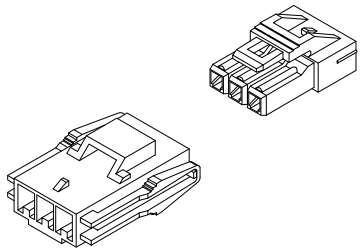

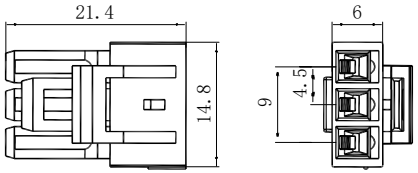

Part Number: 4502WF-S0300WH

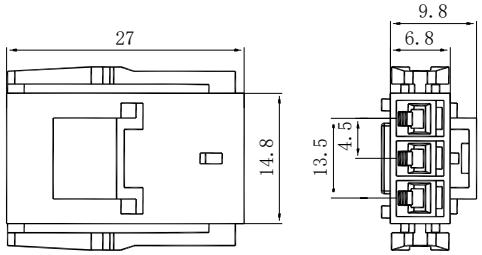

Part Number: 4502WM-S0300WH

							General Tolerance	Zeakka Electronics				Document No.: ZK-4502W-S		
							.X ±0.3					Title: HOUSING, CRIMP TYPE, SINGLE ROW, 4.5MM PITCH		
							.XX ±0.2							
							.XXX ±0.1	APPR	CH'K	DRWN	Date	Dimensions	Scale	Version
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION				2020.8.8	mm	1:1	A

Specifications:

Current Rating: 10.0A AC/DC
Voltage rating: 300V AC/DC
Temperature range: -25°C to +85°C
Contact resistance: 15mΩ max.
Insulation resistance: 1000MΩ min.
Withstand voltage: 1500V AC/minute
Applicable wire: AWG28 - AWG16
Insulation OD: max 2.70mm
Package: reel

Material:

Phosphor bronze

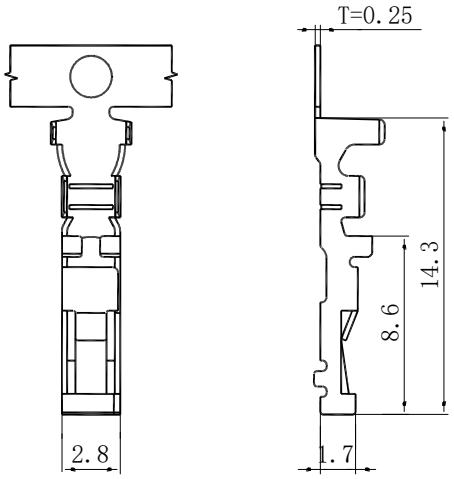

Part Number: 4502TF-PT

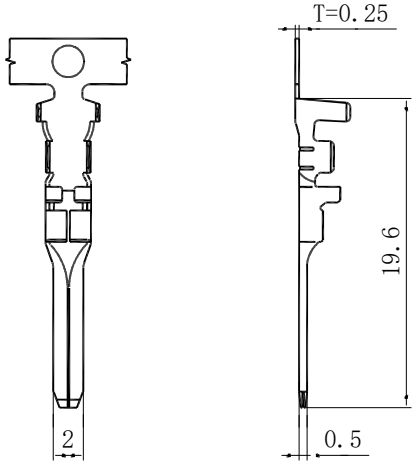

Part Number: 4502TM-PT

							General Tolerance	Zeakka Electronics				Document No.: ZK-4502T		
							.X ±0.3					Title: TERMINAL, CRIMP TYPE, PHOSPHOR BRONZE, TIN, REEL		
							.XX ±0.2							
							.XXX ±0.1	APPR	CH'K	DRWN	Date	Dimensions	Scale	Version
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION				2020.8.8	mm	1:1	A